


NOTES:

- 101. USE OF SUSPENDED SCAFFOLDING MUST COMPLY WITH OSHA 29 CFR 1926.451(f) AND ANY APPLICABLE LOCAL REGULATIONS.
- 102. ALL PERSONNEL ON SUSPENDED SCAFFOLDING MUST HAVE AN INDEPENDENT FALL ARREST SYSTEM THAT COMPLIES WITH OSHA 29 CFR 1926.451(g) AND ANY APPLICABLE LOCAL REGULATIONS.
- 103. LOAD ON SUSPENDED SCAFFOLDING PLATFORM MUST BE UNIFORMLY DISTRIBUTED. PLATFORM MUST REMAIN LEVEL. HOISTS MUST BE OPERATED SIMULTANEOUSLY.
- 104. SUPPORTING STRUCTURE MUST HOLD 4 TIMES HOIST RATED CAPACITY.

- 105. REFER TO SPECIFIC HOIST MANUAL FOR INSTRUCTIONS ON INSTALLATION AND OPERATION.
- 106. HOIST RATED CAPACITY MUST MEET OR EXCEED HALF THE COMBINED PLATFORM WEIGHT AND LIVE LOAD.

MAXIMUM PLATFORM CAPACITY

1000 LB/4 PERSONNEL FOR 3 FT TO 40 FT OVERALL PLATFORM LENGTH
750 LB/3 PERSONNEL FOR 41 FT TO 50 FT OVERALL LENGTH

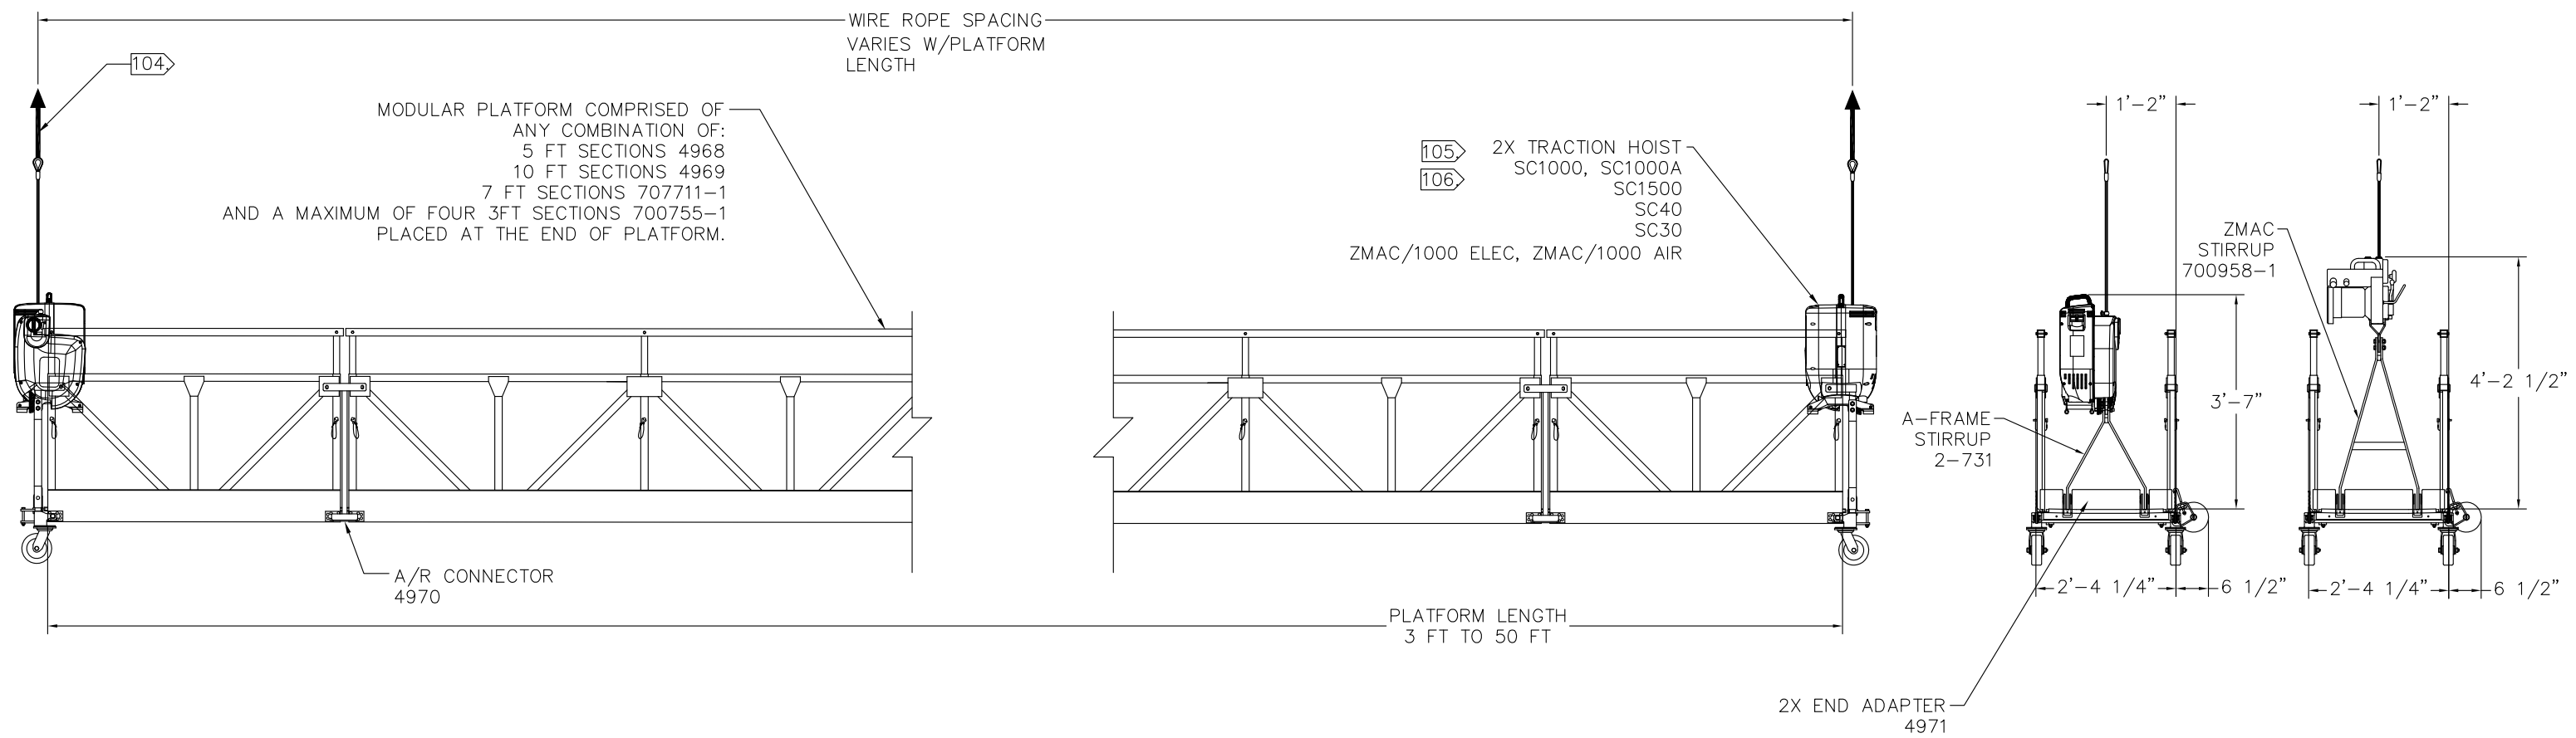

SPIDER MODULAR PLATFORM WITH END ADAPTER MOUNTED HOISTS

REV 1	ECO	BETA RELEASED	DATE	3-21-13	BY	TSM	CK	JTA
Spider A Division of SafeWorks, LLC			MATERIAL:					
365 UPLAND DRIVE SEATTLE, WASHINGTON 98188			THIS DRAWING IS THE PROPERTY OF SAFEWORKS, LLC. AND IS NOT TO BE COPIED OR REPRODUCED WITHOUT THE WRITTEN CONSENT OF SAFEWORKS, LLC.					
DRAWN BY TSM			DATE 3-21-13			TITLE		
ENG JTA			SCALE D 3/4":1'-0"			SPIDER MOD PLATFORM		
DRAWING NUMBER			GA1001			1 OF 1		