
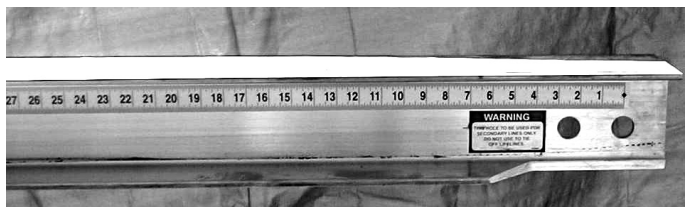


# Beams

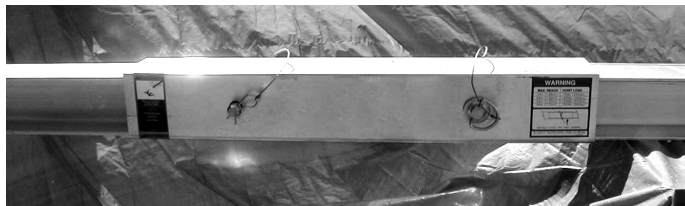

## 5 x 5 Outrigger Beam Key Features:

- 3 different configurations for overall length:
  - 16 ft (4.9 m), 22 ft (6.7 m) and 25 ft (7.6 m)
- The longest possible outreach available without extra parts
  - 74 in. (1,880 mm) when used with a 750 lb. (340.2 kg) hoist
  - 66 in. (1,676 mm) when used with a 1,000 lb. (453.6 kg) hoist
  - 54 in. (1,372 mm) when used with a 1,250 lb. (567 kg) hoist
  - 48 in. (1,219 mm) when used with a 1,500 lb. (680.4 kg) hoist
- No truss systems to lose, forget or learn how to set up
- No tools needed for assembly; uses the first splice tube assembly ever developed
- Safety labels insure proper set up
- Measuring tape label system determines outreach instantly
- Beams are designed to accept two wire ropes for secondary wire rope safety systems. This decreases the equipment needed for 4-line systems.
- Extensive product labeling makes set up goof-proof.
- Front and rear beams are identical, reducing the chance of loading the wrong parts on the truck.
- Counterweight chart label shows how many 50 lb. (22.7 kg) weights are required for your outreach: No guesses, no math
- Works with all Spider outrigger stands and most other stands
- Built by Spider in the USA


## Optional accessories:

- Beams can be used with SA-10842 Adjustable Outrigger Stand
- Can also be used with outrigger towers, gantry frames and assorted rigging accessory products as shown on the following pages.

**Extend your outreach by up to 8 ft (2.4 m) and 1,000 lb (453.6 kg) by adding the 5x5 Max Reach Assembly.**

**See page 98 for details.**

CLAMP TO PREVENT BEAM FALLING IN OR OUT  
USE 3/8X3X3X18 LONG ANGLES BOLTED AROUND BEAM 2 PL  
USE 1/2 INCH GRADE 5 BOLTS OR ALL THREAD AND NYLOCK NUTS  
DO NOT DRILL THRU BEAM

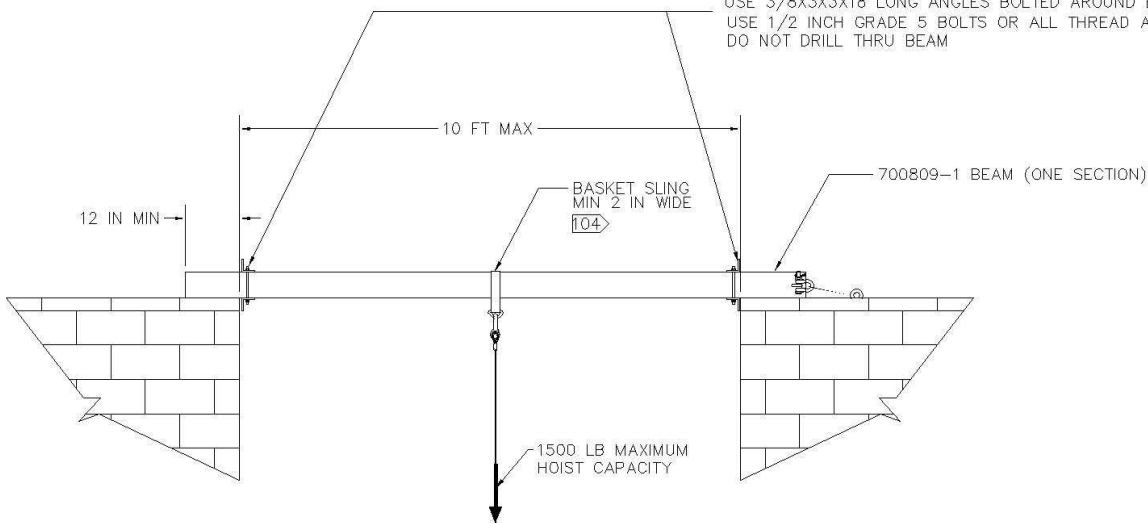

## Portable Outrigger Beams

Part Number	Description	Total Length	Maximum Reach	For more information
8-0217-6	5 x 5 Outrigger Beam	16 ft (4.9 m) [2 x 8 ft (2.4 m)] with splice tube	74 in. (1,880 mm) @ 750 lb (340.2 kg) 66 in. (1,676 mm) @ 1,000 lb (453.6 kg) 54 in. (1,372 mm) @ 1,250 lb (567 kg) 48 in. (1,219 mm) @ 1,500 lb (680.4 kg)	See page 110
8-0217-7	5 x 5 Outrigger Beam	22 ft (6.7 m) [2 x 8 ft (2.4 m) beams, plus 9 ft (2.7 m) splice tube]	74 in. (1,880 mm) @ 750 lb (340.2 kg) 66 in. (1,676 mm) @ 1,000 lb (453.6 kg) 54 in. (1,372 mm) @ 1,250 lb (567 kg) 48 in. (1,219 mm) @ 1,500 lb (680.4 kg)	See page 110
8-0217-5	5 x 5 Outrigger Beam	25 ft (7.6 m) [3 x 8 ft (2.4 m) beams, plus 2 x 3 ft (0.9 m) splice tubes]	74 in. (1,880 mm) @ 750 lb (340.2 kg) 66 in. (1,676 mm) @ 1,000 lb (453.6 kg) 54 in. (1,372 mm) @ 1,250 lb (567 kg) 48 in. (1,219 mm) @ 1,500 lb (680.4 kg)	See page 110
700809-1	6 in. (152 mm) Square Tube, 1/4 in. (6 mm) Wall Outrigger Beam	24 ft (7.3 m) [2 x 12 ft (3.7 m)]	84 in. (2,134 mm) @ 1,000 lb (453.6 kg) 72 in. (1,829 mm) @ 1,250 lb (567 kg) 60 in. (1,524 mm) @ 1,500 lb (680.4 kg)	See page 112
700819-1	6 in. (152 mm) Square Tube, 1/2 in. (13 mm) Wall Outrigger Beam	30 ft (9.1 m) [1 x 10 ft (3 m) and 1 x 20 ft (6.1 m)]	135 in. (3,429 mm) @ 1,000 lb (453.6 kg) 114 in. (2,896 mm) @ 1,250 lb (567 kg) 102 in. (2,591 mm) @ 1,500 lb (680.4 kg)	See page 113

**Call or click for more information**  
**1-877-774-3370**  
**[www.spiderstaging.com](http://www.spiderstaging.com)**